




AVANT A2D+
Dual Channel Audiometer


Compact PC-Based Diagnostic Audiometer

Complete Air, Bone, Speech
and Masking Audiometer.
Diagnostic Testing Faster and
Easier.



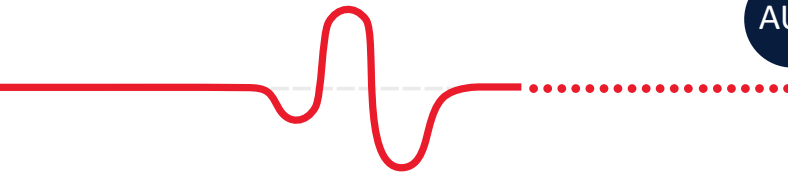

AUD

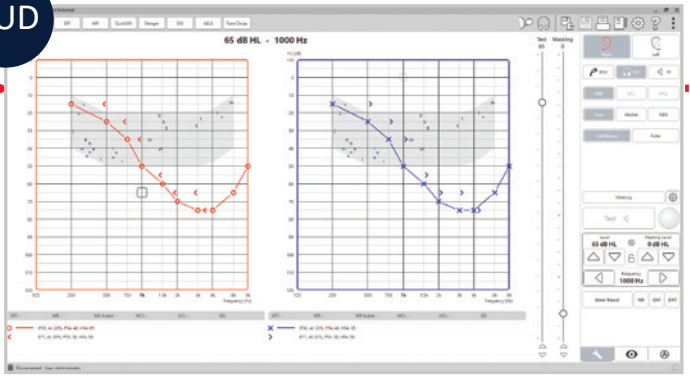


Dual Channel Audiometry

Perform air conduction, bone conduction, masking and speech testing using the mouse and/or keyboard with ease.

A2D+ Standard Accessories

- Transducers: DD65v2, DD45 or IP30
- Bone Conductor
- Operator Mic / Monitor Headset
- Patient Response Switch
- Talkback Microphone
- Auditec Sound File License
- QuickSIN™ License
- ACT™ License
- USB Cable
- Software & Manuals
- Carrying Case

WR

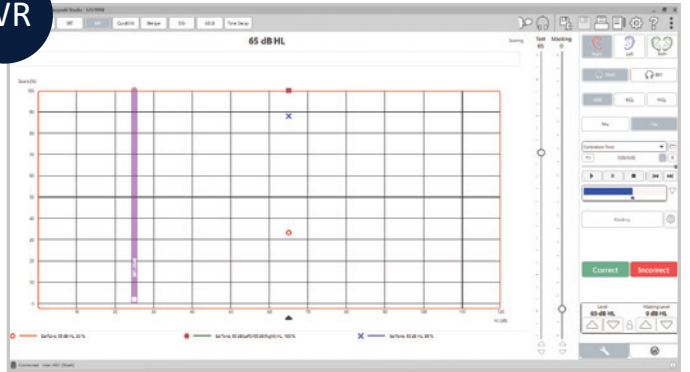


Word Recognition (WR)

WR testing measures the percentage of mono-syllable words repeated correctly from a phonetically balanced list.

A2D+ Optional Accessories

- DD450 Headphones

S

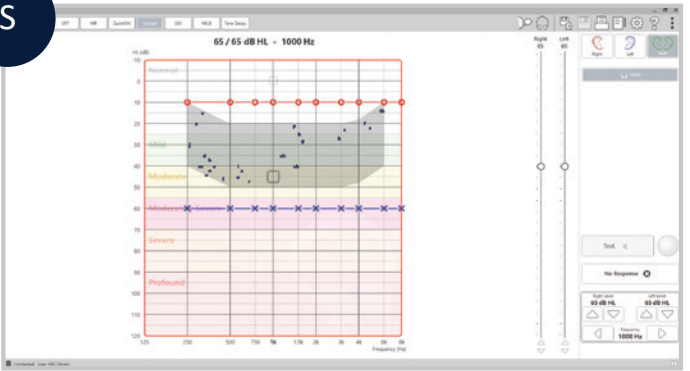


Stenger Test

Stenger is performed when there is a 20dB difference between ears.



The AUD Module offers pure tone audiometry via earphones and bone conduction.

HLS MHA

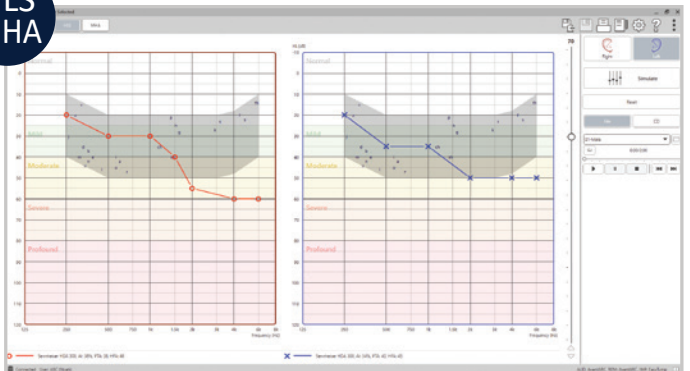

HLS/MHA

Easily simulate hearing loss and hearing instruments for patients.

Complete Air, Bone, Speech and Masking Audiometry

- Dual Channel Audiometry
- Complete Air, Bone, Speech and Masking Audiometry
- Integrated QuickSIN™ and Automated Audiometry
- Built-in Special Tests, Word Lists and Auto-Scoring
- ACT™ Test - Addresses patient's complaint
 - hearing in noise
- Tinnitus Test - Precisely Identify a Patient's Tinnitus
- HLS (Hearing Loss Simulator) & MHA (Master Hearing Aid) for 3rd Party Demonstration
- PC Based and Portable
- HID Device - True Plug and Play
- USB Connection to Computer
- Noah, TIMS, Blueprint OMS and Sycle Compatible

MedRx AVANT A2D+ Audiometer

The AVANT A2D+ audiometer is MedRx's most popular audiometer model designed for traditional diagnostic testing. This dual-channel audiometer performs all tests required for a standard hearing appointment and additional tests for special cases. At approx. only 16 cm x 12 cm x 3 cm (L x W x H) and less than 500 g in weight, when combined with a laptop is portable and easily configured for any office layout. MedRx is an industry leader in user-friendly computer-based audiometers. From research and development to your clinic, we take pride in our products every step of the way.

Studio Software AUD Module

The A2D+ Audiometer software can run stand-alone or from within the Noah System. The AUD Studio Software Module offers pure tone audiometry via earphones and bone conduction, masking and speech audiometry with SRT (Speech Recognition Threshold), WR (Word Recognition), SISI (Short Increment Sensitivity Index), ABLB (Alternate Binaural Loudness Balance), Stenger, Tinnitus Test, Tone Decay and Integrated ACT™ (Audible Contrast Threshold) Test, QuickSIN™ Testing & Automated Audiometry. Several options are available which allow the user to customize the A2D+ Software to meet their needs.



Counseling Tools (HLS/MHA)

The Hearing Loss Simulator (HLS) demonstrates the effect of the client's hearing loss for the spouse or family member. The program attenuates an input signal to simulate the severity of the loss for the third party. The Master Hearing Aid Simulator (MHA) demonstrates the benefits of amplification of a hearing aid to an inexperienced user. Using these tools can empower the patient and third party to make informed decisions about their hearing healthcare.



AVANT A2D+

Technical Specs

Standards: ANSI S3.6, Type 2 AE (IEC 60645-1&2) Tone Audiometry, Speech Audiometry, Stenger Test, QuickSIN™, ABLB, SISI, Tinnitus Test, ACT™ Test, Tone Decay, Hughson Westlake Automated Audiometry

Channels: Two

Outputs: Insert Earphones, Headphones, Bone Conductor, Free Field – Line Level Output

Tone Stimuli: Pure Tone, Warble Tone, Continuous Or Pulsed. Warble Modulation Frequency And Pulse Period Are User Adjustable

Masking Signals: Tone Audiometry: Narrow Band Noise (Default), Speech Weighted Noise, White Noise. Speech Audiometry: Speech Weighted Noise (Default), White Noise, External Recorded (Opposite Channel)

Frequency Range USB Power Only: Air: 125 Hz – 8000 Hz, Bone: 250 Hz – 8000 Hz, Sound Field: 125 Hz – 8000 Hz (Line Level)

Acoustic Distortion: < 1.0% At 500 Hz, 100 dB SPL

Noise Floor: < -10 dB HL From 125 Hz – 8000 Hz

Attenuation: 1 dB Or 5dB Steps, User Selectable

Minimum / Maximum Output: -10 dB To 120 dB HL At 1 KHz – Air (¼ Inch Mono Jacks), -10 dB To 75 dB HL At 1 KHz – Bone (¼ Inch Mono Jack)

Free Field Output: Frequency Range 125 Hz – 8000 Hz, Dynamic Range 60-90+ dB SPL At 1 Meter Distance, (Using 50 Watt Stereo Amplifier With 89 dB Sensitivity Speakers)

Speech Input: Microphone (3.5 mm Stereo Jacks)

I/O Jacks – 3.5mm: Operator Headphones (Output), Operator Talk Forward Microphone, Patient Talk Back Microphone, Free Field (Line Out)

I/O Jacks – 1/4": Left Air Conduction (2), Right Air Conduction (2), Bone Conduction, Patient Response Switch

Communication Port: USB (Provides All Device Power)

Power Requirements: USB Power +5 Volts DC, Less Than 500mA

Enclosure: Aluminum Chassis Bottom, Molded PC ABS With Stainless Steel Insert Top Cover With Plastic Feet

Operating Temperature: 10°C To 35°C

Operating Humidity: 30% To 90%

Storage Temperature: -20°C To 50°C

Storage Humidity: 10% To 90%

Dimensions: Approx. 16 cm x 12 cm x 3 cm (L x W x H)
Approx. 6.5" x 5" x 1.25" (L x W x H)

Weight: < 500 g < 1 lb

Standard Accessories: Transducers: DD65v2, DD45 Or IP30, Bone Conductor, Operator Mic / Monitor Headset, Patient Response Switch, Talkback Microphone, Auditec Sound File License, QuickSIN™ License, ACT™ License USB Cable, Software & Manuals, Carrying Case

Optional Accessories: DD450 Headphones

MedRx Minimum Computer Specs:

Windows® PC compatible computer, Intel™ i5, 2.0 GHz or better. 4 GB RAM. 20 GB free hard drive space. Available 2.0 USB Port. Windows 10 or 11 Professional, Compatible with 3.0 USB.

MedRx®

Good Things Come in Small Packages

MedRx International

DGS Diagnostics Sp. z o.o.

Rosówek 43

72-001 Kołbaskowo, Poland

Phone: +48 91 835 63 00

Email: orders@medrx-diagnostics.com

www.medrx-diagnostics.com

Distributed by:



The AVANT A2D+ is a dual channel, air, bone, speech and masking audiometer.

MX-A2D-INTDS-1 Rev. 6

